
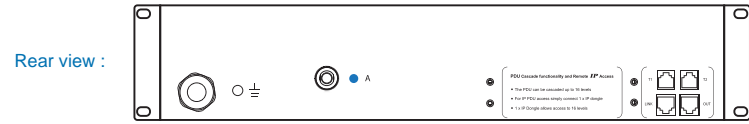



PDU specification drawing

1-Phase 230V 10A / 16A / 20A switched PDU + outlet measurement : C13 x 16 + C19 x 4

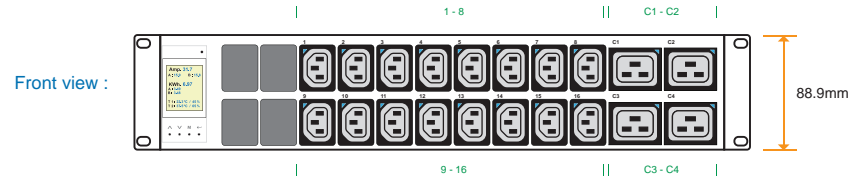

Resettable fuse MCB **MCB or fuse : refer to the models below**

Top View :

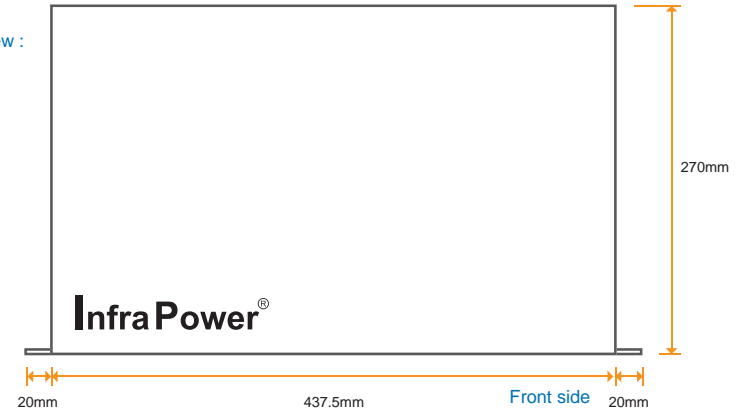

20A model :	Fuse	MCB
H16C13/4C19-20A-WSi/F_OE/3B-1	1	-
H16C13/4C19-20A-WSi/CR_OE/3B-1	-	1



Input Rating : 20A, 230V
Inlet : 20A open end
Cordset : 3 meter 2.5mm sq. H05V V-F cordset
Protection : 20A resettable fuse or 20A hydraulic MCB x 1
Circuit Details : Output 20A max. C 13 # 1-16 + C 19 # C 1 - C 4

16A model :	Fuse	MCB
H16C13/4C19-16A-WSi/F_EN/3B-1	1	-
H16C13/4C19-16A-WSi/CR_EN/3B-1	-	1



Input Rating : 16A, 230V
Inlet : 16A IEC60309 2P+E plug
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit Details : Output 16A max. C 13 # 1-16 + C 19 # C 1 - C 4

16A model :	Fuse	MCB
H16C13/4C19-16A-WSi/F_C20/3B-1	1	-
H16C13/4C19-16A-WSi/CR_C20/3B-1	-	1



Input Rating : 16A, 230V
Inlet : 16A IEC320 C20 plug
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 16A resettable fuse or 16A hydraulic MCB x 1
Circuit Details : Output 16A max. C 13 # 1-16 + C 19 # C 1 - C 4

10A model :	Fuse	MCB
H16C13/4C19-10A-WSi/F_C14/3B-1	1	-
H16C13/4C19-10A-WSi/CR_C14/3B-1	-	1



Input Rating : 10A, 230V
Inlet : 10A IEC320 C14 plug
Cordset : 3 meter 1.5mm sq. H05V V-F cordset
Protection : 10A resettable fuse or 10A hydraulic MCB x 1
Circuit Details : Output 10A max. C 13 # 1-16 + C 19 # C 1 - C 4

Single phase switched PDU + outlet measurement

Outlet : 10A Rated IEC320 C13 x 16
16A Rated IEC320 C19 x 4

AUSTIN HUGHES Design. Manufacturing. Global Services.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

Copyright 2017 Austin Hughes Electronics Ltd. All rights reserved.

Meter Features (WSi Switched PDU + Outlet Measurement)

Local Display : Field replaceable 1.8" color LCD
Bank Measurement : Current (A), Energy (kWh), Voltage (V) & Power factor
Outlet Measurement : Current (A), Energy (kWh)
Outlet Control : Outlet Switch ON / OFF
Accuracy : ±1% true RMS
IP Access : via IP dongle, one IP Access up to 16 PDU Levels
Cascade : Up to 16 PDU under single IP address via IP dongle
SNMP : via IP dongle
Sensor Port x 2 : Temp. Sensor / Temp. + Humid. Sensor

EMC Compliance : FCC & CE certified
Safety Compliance : CE / LVD certified
Environment Compliance : RoHS2 & REACH

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity : 8 to 95% RH, non-condensing

Dimension : 437.5 (W) x 270 (D) x 88.9 (H) mm
Material : Steel
Color : Black (chassis)