

# CS78

## 8-Port KVM Switch


The CS78 KVM switch is a control unit that allows access to 8 computers from a single console (keyboard, monitor, and mouse). It provides pushbuttons and hotkey combinations for convenient computer selection. Setup is fast and easy; plugging cables into their appropriate ports is all that is entailed. A powerful Auto Scan feature also permits auto scanning and monitoring the activities of all computers on the installation one by one.



Rear View



### Diagram

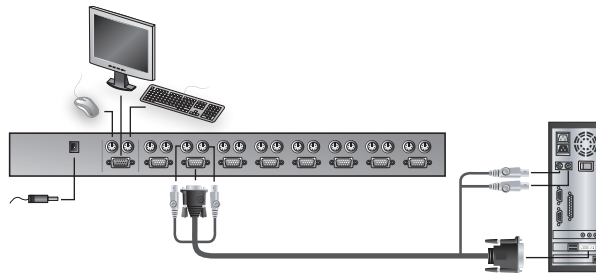

### Features

- One PS/2 console controls 8 computers
- Computer selection via front panel pushbuttons or hotkeys.
- Keyboard and mouse emulation for error free booting
- Supports Microsoft IntelliMouse, Logitech MouseMan, FirstMouse, IBM Scrollpoint Mouse
- Auto Scan function to monitor computer operation
- Superior video quality: up to 1920 x 1440; DDC2B
- SVGA, VGA, and Multisync Monitor Support
- Hot Pluggable - Add or remove computers for maintenance without powering down the switch
- LED display for easy status monitoring
- Rack mountable in 19" (1U) system rack.

### Specifications

Function		CS78	
Computer Connections		8	
Port Selection		Hotkey, Pushbutton	
Connectors	Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x 6-pin Mini-DIN Female (Green)
	KVM Ports	Keyboard	8 x 6-pin Mini-DIN Female (Purple)
		Video	8 x HDB-15 Male (Blue)
Mouse		8 x 6-pin Mini-DIN Female (Green)	
Power		1 x DC Jack (Black)	
Switches	Port Selection	8 x Pushbutton	
	Reset	1 x Semi-recessed Pushbutton	
LEDs	On Line	8 (Green)	
	Selected	8 (Orange)	
	Power	1 (Blue)	
Emulation		Keyboard/Mouse	
Video		1920 x 1440; DDC; DDC2; DDC2B	
Scan Interval		5 Seconds	
Power Consumption		DC9V; 1.98W (Max.)	
Environment	Operating Temp.	0 - 40°C	
	Storage Temp.	-20 - 60°C	
	Humidity	0 - 80% RH	
Physical Properties	Housing	Metal	
	Weight	2.85 kg	
	Dimensions (L x W x H)	48.3 x 15.0 x 4.45 cm (19"/1U)	

\* The specifications and pictures are subject to change without notice.