

Virtual VNC Console

Enables wireless presentation without cable swapping

The KE8220 is a wireless presentation system offering the ability to transmit any computer's desktop environment to a projector or display over a network for high quality presentations. With a standard VGA connector (HDB-15) and 802.11b/g capability, the KE8220 ensures compatibility with the widest range of display devices available while enabling wireless presentations without cable swapping. User-friendly AltusenVNC software is downloadable from KE8220's embedded web server, allowing anyone in the meeting to switch focus between computers seamlessly with a single mouse-click. This plug and play device is compatible with all major Windows operating systems, including Windows 2000, XP, 2003 and Vista. The KE8220 is an exceptional meeting room tool that can streamline presentations and enhance productivity.



Wireless-G USB Adapter Included!

Supports WLAN operation with Wireless-G USB Adapter



Features


- 802.11 b/g support for wireless presentation without cable swapping
- Display computer's screen on projector via network without distance limitation
- Real-time display of PowerPoint presentations, images and applications
- Seamlessly switch focus between computers with a single mouse-click
- Compatible with all projectors and displays with standard VGA connectors
- Supports high-quality video display resolutions up to SXGA (1280 x 1024) @ 60 Hz
- Executable AltusenVNC software downloadable from the KE8220 embedded web server – enables real time presentations
- No Access Point required – AD-HOC mode with DHCP server support enables a direct wireless connection between the KE8220 and a laptop PC
- Automatic discovery and multilingual UI support simplifies presentation process
- Wireless WEP key (64, 128 & 256-bit) to protect your presentation materials
- Support static and automatic (DHCP) network configuration
- Compatible with Windows 2000/2003/XP/Vista
- Rack Mountable

Application

Application 1 : Wireless Presentation




Application 2 : Remote Presentation

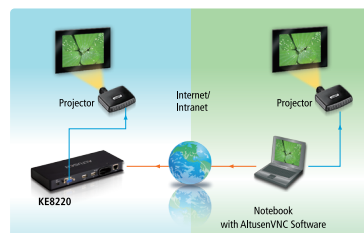

Remote Conference Room Local Conference Room

Setup

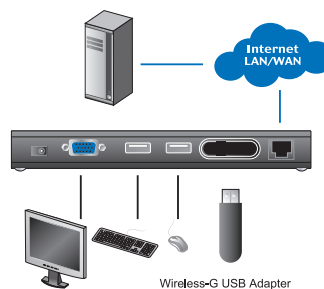

* WLAN operation requires the Wireless-G USB Adapter

** AltusenVNC must be installed and operating on the remote computer.

Specifications

| Function | | | KE8220 |
|---------------------|---------------------------|------------------------------|-------------------------------|
| Connectors | Console Ports | Keyboard | 1 x USB Type A Female (White) |
| | | Video | 1 x HDB-15 Female (Blue) |
| | | Mouse | 1 x USB Type A Female (White) |
| | Power | | 1 x DC Jack |
| | LAN | | 1 x RJ-45 Female |
| | WLAN | | 1 x USB Type A Female (White) |
| Switches | Reset | 1 x Semi-recessed Pushbutton | |
| LEDs | WLAN | | 1 (Orange/Green) |
| | 10/100 Mbps | | 1 (Orange/Green) |
| | Link | | 1 (Green) |
| | Power | | 1 (Green/Orange) |
| Video | | | 1280 x 1024 @ 60 Hz |
| Power Consumption | | | DC5.3V, 3.8W |
| Environment | Operating Temp. | | 0–50° C |
| | Storage Temp. | | –20–60° C |
| | Humidity | | 0–80% RH, Non-condensing |
| Physical Properties | Housing | | Metal |
| | Weight | | 0.50 kg |
| | Dimensions (L x W x H) | | 20.00 x 8.00 x 2.50 cm |

* The specifications and pictures are subject to change without notice.