




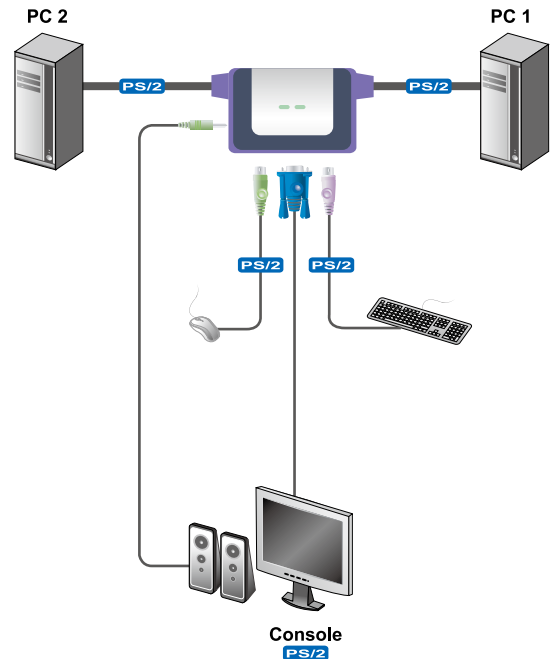


CS62A

2-Port PS/2 KVM Switch

CS62A 2-Port KVM Switch has a handy design integrating with 4 feet of cables. It can control 2 servers via a single console.

Diagram



-  Console
PS/2
-  Computers
PS/2
-  OS Support
Win, Linux, FreeBSD
-  Audio
Speaker
-  Non-Powered

Supports computers that are equipped with speakers

Features

- One PS/2 console controls two PS/2 computers
- Compact design, built-in 1.2 m cables
- All-in-one design
- With speaker support
- Superior video quality – up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered

Specifications

Function		CS62A	
Computer Connections		2	
Port Selection		Hotkey	
Connectors	Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x 6-pin Mini-DIN Female (Green)
		Speaker	1 x Mini Stereo Jack Female (Green)
	KVM Ports	Keyboard	2 x 6-pin Mini-DIN Male (Purple)
		Video	2 x HDB-15 Male (Blue)
		Mouse	2 x 6-pin Mini-DIN Male (Green)
		Speaker	2 x Mini Stereo Plug Male (Green)
LEDs	Selected	2 (Green)	
Cable Length	Computers	1.2m	
Emulation	Keyboard/ Mouse	PS/2	
Video		2048 x 1536; DDC2B	
Scan Interval		3, 5, 10, 20 Seconds	
Environment	Operating Temp.	0-50°C	
	Storage Temp.	-20-60°C	
	Humidity	0-80% RH, Non-condensing	
Physical Properties	Housing	Plastic	
	Weight	0.41 kg	
	Dimensions (L x W x H)	12.00 x 4.95 x 2.50 cm	

* The specifications and pictures are subject to change without notice.